


# FE Bending TPS-S9700

- High Speed
- High Quality
- High Efficiency

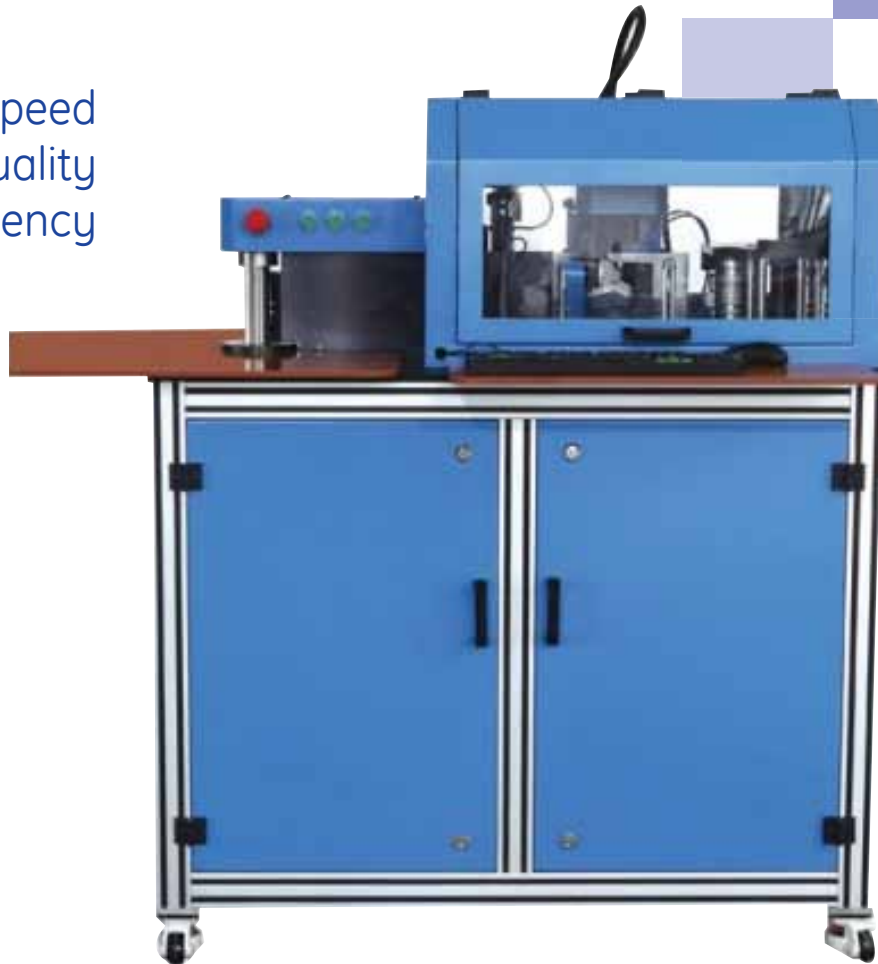

1 YEAR  
WARRANTY

TPS-S9700 multifunctional automatic bent words machine based on precision of machinery structure, fixed knife Rod folding bent mode, used Qian reset sent material school flat, and rolling synchronization sent materials and silk Rod double screw thumb driven opened slot way, and built-in high performance more axis campaign control card, using independent development of dedicated folding bent software system control, ensure processing products of forming precision, is upscale LED words, and aluminum profile words, and stainless steel words, and punch words, and resin words Wai edge of preferred economic output equipment.

#### Equipment advantages

- High molding, processing deviation <0.1mm finished with the total length of the original file, and ensure consistency with the duplication of documentation produced;
- Coincide with the various kinds of precision cutting of panels 99%;
- Original Germany imported high hardness special stainless steel slotted tool, the tool uses cost only 0.02/slot;
- Roll-feed, with the unique closed-loop design, ensuring that feed high-accuracy output;
- Powerful bending Rebound compensation coefficient database, available for various materials processing;
- Smart interference check to prevent bending and folding during hard contact with the mechanical structure;
- Lifelong enjoyment of operating software free upgrade;
- Professional, efficient and attentive service.

#### Software support

DXF/PLT file input, support for CAD, TYPE3, CORELDRAW, ILLUSTRATOR, etc.

# Product Specification

Power supply	AC220V
Rated power	3.5Kw
Input compressed air	0.6-0.8Kg/cm2
Weight	500Kg
Number of controlled axis	7
Bend	Automatic bend
The minimum bend RADIUS	15mm
Inside and outside the minimum angular distance	9mm
Start to bend distances	4mm
Processed material	Stainless steel\ Iron sheet\ Aluminum
Input file format	PLT\DXF
Control system software	Special bend for homegrown software
Shipping method	Liquid hydraulic shipping
Servo motor	2
Stepping Motor	5
Altitude the processing material	26-120mm
Material thickness	0.6-1.0mm

The information provided on this data sheet represents typical physical properties and does not constitute a specification. No liability will be accepted for errors and omissions and under no circumstances shall Flex-Europa be liable for any loss or injury arising directly or as a consequence of the publication of this data sheet . All Flex-Europa vinyl's are sold subject to our Conditions of Sales. Flex-Europa also retains the right to change sizes and specifications of products without prior notice.



[www.flex-europa.me](http://www.flex-europa.me)

Contact us: [info@flex-europa.me](mailto:info@flex-europa.me)

Sharjah Airport Int'l Freezone. Plot # F3-17, P.O. Box 8509 Sharjah, UAE. Tel +971 6 5578 200 Fax +971 6 5578 300